## PRODUCT SPECIFICATION SHEET






## **Product Figure Descriptions:**


- 40"-50"-60"-72-84" Wall Recessed & Wall mounted Electric fireplace
- Two levels heating functions, first step heating 750W, Second step heating 1500W
- Five levels flame brightness adjustment
- Four levels ember bed brightness and pulsating
- Four levels flame speed adjustment
- Equipped with electronic timer from 0.5-8 hours
- Multiple <u>Ten</u> Colors LED lights for flame decoration
- Multiple <u>Ten</u> Colors LED ember bed light and Auto cycle
- Multiple <u>Ten</u> Colors LED down- light
- Temperature setting:


	NO	0	1	2	3	4	5	6	7	8	9	10	N
I	°C	20	21	22	23	24	25	26	27	28	29	30	C
Ī	°F	68	<b>70</b>	72	74	<b>76</b>	<b>78</b>	80	82	84	86	88	F


- Operate with both remote control and control panel
- High quality black decorative crushed glass, log-sets for ember decoration
- With Black glossy high end tempered glass panel
- Air for heating blows out from front
- Product equipped with over heat production safety device
- Installation hardware kits are included
- Suitable for 400 Square feet room space

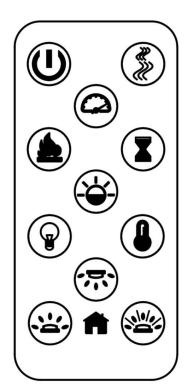

## **PRODUCT SPECIFICATION SHEET**

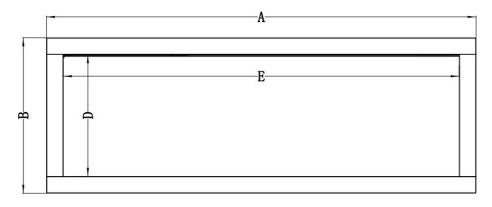





PRODUCT DIMENSIONS (mm)									
Model Number	Α	В	С	D	E	F	G	Н	
BEF-40BI12	39-3/8"	18-1/8"	6-1/4"	14-1/8"	35-7/16"	37-7/16"	16-7/8"	5-9/16"	
DEF-40DI12	[1000mm]	[460mm]	[159mm]	[360mm]	[900mm]	[950mm]	[428mm]	[141mm]	
BEF-50BI12	50"	18-1/8"	6-1/4"	14-1/8"	46"	48"	16-7/8"	5-9/16"	
DEF-50DI12	[1270mm]	[460mm]	[159mm]	[360mm]	[1170mm]	[1220mm]	[428mm]	[141mm]	
BEF-60BI12	60"	18-1/8"	6-1/4"	14-1/8"	56"	58"	16-7/8"	5-9/16"	
BEF-60BI12	[1524mm]	[460mm]	[159mm]	[360mm]	[1424mm]	[1474mm]	[428mm]	[141mm]	
BEF-72BI12	72"	18-1/8"	6-1/4"	14-1/8"	68"	70"	16-7/8"	5-9/16"	
DEF-/2DI12	[1830mm]	[460mm]	[159mm]	[360mm]	[1730mm]	[1780mm]	[428mm]	[141mm]	
DEE 04DI42	84"	18-1/8"	6-1/4"	14-1/8"	80"	82"	16-7/8"	5-9/16"	
BEF-84BI12	[2135mm]	[460mm]	[159mm]	[360mm]	[2035mm]	[2085mm]	[428mm]	[141mm]	

## **Product Parameter:**

Voltage:	120V~		Flame Speed:	4 levels	
Frequency:	60Hz		Ember-bed brightness:	4 levels and Pulsating	
Low Heat:	750W (2500BTU)	<b>€</b>	Fuel bed media:	Logs/Crushed-glass /Crystals	
High Heat:	1500W (5110BTU)	<b>W</b> E	Remote Control:	Yes Yes Yes	
Flame Color:	10 Colours	c Us	Control Panel:		
Embed Bed Color:	10 Colours		Temperature setting:		
Down-light:	own-light: 10 Colours		Timer setting:	0.5-8Hours	
Flame Brightness:	5 levels	Certificate	Hardware Kit:	Included	